


ALL MATERIAL ARE ROHS AND CALIFORNIA PROP.65 COMPLIANT




CUSTOMER'S APPROVAL: _____ DATE: _____
 FIRST ARTICLE SAMPLE REQUIRED: YES, NO.

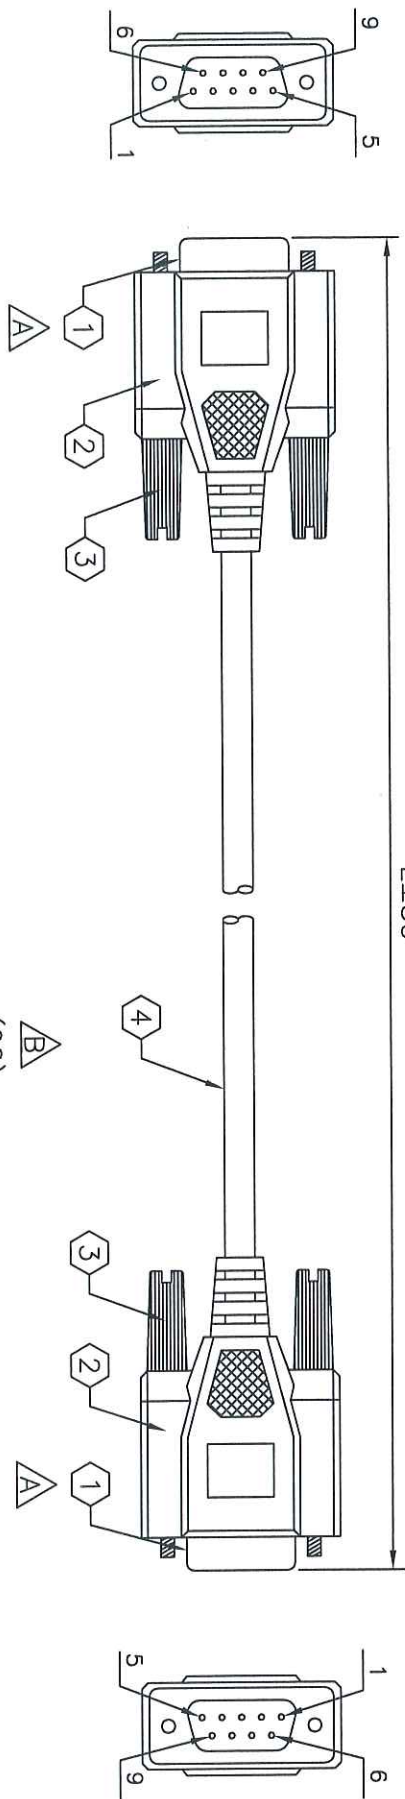

PINOUT CONFIGURATION

DB9/FEMALE	DB9/FEMALE		
1	NC	1	1
2		2	3
3		3	2
4		4	6
5		5	5
6		6	4
7		7	8
8		8	7
9	NC	9	9
SHELL		SHELL	SHELL

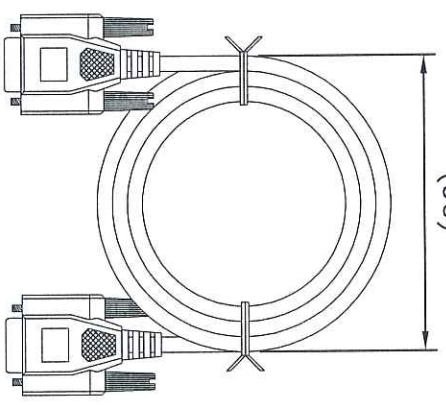

P/N	L
DB9F-DB9F-1.5M	1500
DB9F-DB9F-2M	2000

UNIT: mm

ITEM	DESCRIPTION	QTY.	UNIT
1	DB9 FEMALE CONNECTOR	2	PCS.
2	BLACK MOLDED PVC HOOD	2	PCS.
3	BLACK #4/40 THUMBSCREW	4	PCS.
4	NON-UL 28AWGx7C+AL-FOIL+DRAIN; BLACK PVC JACKET	SEE DWG.	

REV.	DESCRIPTION	DATE	REVISED BY	TTL's P/N:	Revision:	SALES:
A	CHANGE DB9 CONNECTOR FROM MALE TO FEMALE	MAY.08.08	STANLEY	SEE TABLE	B	EVELYN
B	ADD LENGTH 2M & PACKING	MAY.14.08	STANLEY	RFQ number: 5661	Drawing #: 97043004	
				Drawn by: STANLEY	Scale: None	
				Checked by:	Date: 04/30/2008	

All information herein is proprietary and the exclusive property of Total Technologies, Ltd. Recipient agrees: 1) Not to disclose any of such information to others 2) Not to reproduce in whole or in part 3) To use such information only as directed by Total Technologies, Ltd. Upon request, to return all copies of this document to Total Technologies, Ltd. Specifications are subject to change without prior notice.

Copyright 04-2008
TOTAL TECHNOLOGIES, LTD.
 9 Studebaker, Irvine, CA 92618
 1-800-669-4885